


INTRODUCTION-Eone

This is an LED color screen instrument with compact appearance.
 Adopt LED screen to consume less power and save energy.
 The upgraded version can also be used as a remote to provide customers with more choices.

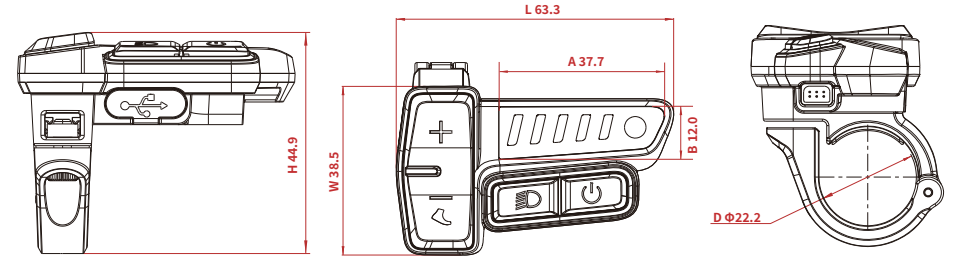

PRODUCT ADVANTAGES

- IPX7 Waterproof
- Board End Connector
- Support UART/CAN Protocol
- Soda Lime Glass Hardness Value:6h
- It Can Be Used As a Remote As Well As an Independent Display
- LED Screen



| Category | | Parameter |
|------------------------|-----------------------|-------------------------|
| Size | L*W*H | 63.3*38.5*44.9mm |
| | A*B | 37.7*12.0mm |
| | C | / |
| | D | Φ22.2mm |
| Screen | Type | LED |
| | Pixel | - |
| Connector | Type | Board End Connector |
| | Length | 500mm |
| Core Data | Rated Voltage | 36V/48V |
| | Support Modes | Three Gear Adjustment |
| | Operating Temperature | -20~50°C |
| | Waterproof | IPX7 |
| | Weight(g) | 37±5 |
| Further Specifications | Com.protocol | UART/CAN |
| Display Content | Type-C | 5V 500mA |
| | Capacity | Yes |
| Test & Certifications | | CE / Rohs/EN15194/Reach |

PRODUCT PARAMETERS

