


INTRODUCTION-X1

With a 3.5-inch color screen in the middle, this display instrument applies to urban leisure bicycles.

The minimalistic appearance highlights the functions of the product itself, matching bicycles of various styles.

PRODUCT ADVANTAGES

- OCA Full-Fit
- IPX7 Waterproof
- Multi-color Gear
- Dynamic Interface
- Board End Connector
- Support UART/CAN Protocol
- Soda Lime Glass Hardness Value:6h
- Customized Backlight Module:450cd/m²

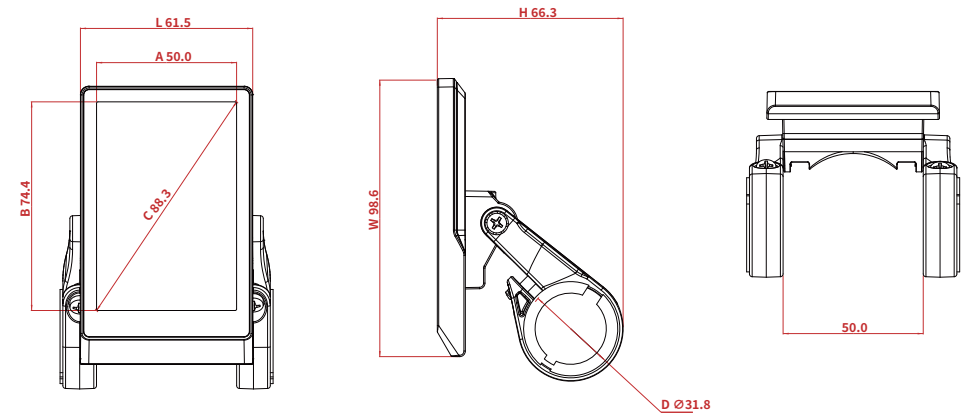

PRODUCT PARAMETERS



Category		Parameter
Size	L*W*H	98.0*61.5*66.3mm
	A*B	50.0*74.4mm
	C	3.5"
	D	Φ25.4/Φ31.8mm
Screen	Type	Color Matrix
	Pixel	320*480px
Connector	Type	Board End Connector
	Length	300/250mm
Core Data	Rated Voltage	36V/48V
	Support Modes	Mode Gear / Digital Gear
	Operating Temperature	-20~50°C
	Waterproof	IPX7
	Weight(g)	146±5
Further Specifications	Com.protocol	UART/CAN
	Bluetooth	Optional
	Light Sensor	Yes
Test & Certifications		CE / Rohs/EN15194/Reach

Display Content	Parameter Setting
Current Speed	Brightness
Max Speed	Unit Switch
Average Speed	Speed Limit
Single Trip	Wheel Size
Total Distance	Magnetic Setting
Range	Voltage Switch
Error Code	Auto OFF
Capacity	Reset
Walk Assistance	/